


Multimodal Indoor Localization: Fusion Possibilities of Ultrasonic and Bluetooth Low-Energy Data

Georg Fischer¹, Joan Bordoy², Dominik Jan Schott¹, *Member, IEEE*,
Wenxin Xiong¹, *Graduate Student Member, IEEE*, Andrea Gabbrielli¹, Fabian Höflinger¹,
Kai Fischer¹, Christian Schindelbauer¹, *Member, IEEE*,
and Stefan Johann Rupitsch¹, *Member, IEEE*

Abstract—The resilience of indoor localization systems is a main concern of their industrial application. A combination of different techniques can enhance the overall robustness of such systems. In this work, we present fusion possibilities of coarse Bluetooth Low Energy localization based on the received signal strength indicator and the finer ultrasound time difference of arrival (TDOA) technique. This approach offers the advantage to robustify the high-accuracy ultrasonic localization in areas with non-optimal coverage. Moreover, the data fusion enables to enhance the overall localization area in a cost effective manner. This contribution proposes and evaluates (i) novel methods of how the ultrasonic system can be extended to a constrained area and (ii) a novel possibility to incorporate available Bluetooth signal strength information in the TDOA algorithm to improve accuracy.

Index Terms—Bluetooth low energy, indoor localization, received signal strength indicator, resilient localization, time-difference-of-arrival, ultrasonic localization.

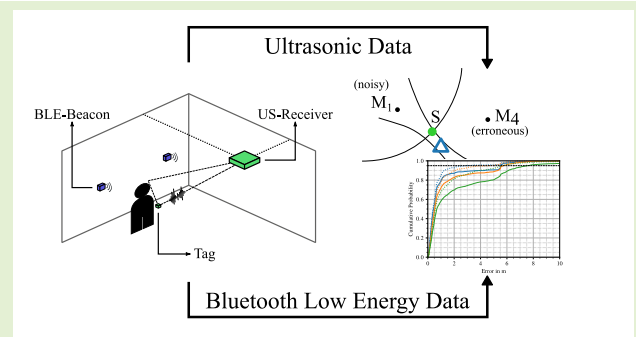

I. INTRODUCTION

IN TIMES of just-in-time networked production, the terms production and logistics are mostly mentioned in the same breath. Logistics costs account for about a quarter of a product across different industries. Therefore, attempts are often made to increase the savings potentials, especially since the logistics costs are scaled across various industries. A digital

representation of the logistics process in Industry 4.0 factory is the basic requirement for modern and efficient process optimization that allows to monitor the process status and track goods flows and ongoing tasks. This requires precise, robust, reliable, and seamless localization of goods and robots. On the other hand, the installation effort of such indoor localization system should be minimal. Since most deployments require a heterogeneity in accuracy, it is feasible to use multiple localization technologies to optimize the cost versus accuracy target. Ultrasonic (US) localization technology may offer a competitive performance in most environments (see e.g. Table I) compared to other technologies but (1) is prone to error in fringe areas or from echos and (2) requires a high installation effort. These two problems are addressed in this paper. By adding another, more coarse localization technology, like Bluetooth Low Energy (BLE), it is possible to achieve a more optimal trade-off between accuracy and cost. Since such beacons are cheaply available and can simply be stuck to a wall, it would be desirable to be able to enhance the US system in low accuracy areas as well as extending the area of coverage with low effort (but with also less accuracy).

This paper is organized as follows: First of all, the related work to the topic is presented in Section II. A short system

Manuscript received November 25, 2021; accepted January 29, 2022. Date of publication February 1, 2022; date of current version March 14, 2022. This work was supported in part by the Fraunhofer Gesellschaft, in part by the State of Baden-Württemberg in the Framework of the MERLIN Project, and in part by the German Ministry of Education and Research (BMBF) under Grant FKZ 16ME0023K (ISA4.0) and Grant FKZ 01IS20029C (ULTRAFLUK). The associate editor coordinating the review of this article and approving it for publication was Prof. You Li. (Corresponding author: Georg Fischer.)

Georg Fischer, Fabian Höflinger, and Kai Fischer are with the Fraunhofer Institute for Highspeed Dynamics, Ernst-Mach-Institute (EMI), 79104 Freiburg im Breisgau, Germany (e-mail: georg.fischer@emi.fraunhofer.de).

Joan Bordoy, Wenxin Xiong, and Christian Schindelbauer are with the Department of Computer Science, University of Freiburg, 79110 Freiburg im Breisgau, Germany.

Dominik Jan Schott, Andrea Gabbrielli, and Stefan Johann Rupitsch are with the Department of Microsystems Engineering (IMTEK), University of Freiburg, 79110 Freiburg im Breisgau, Germany.

Digital Object Identifier 10.1109/JSEN.2022.3148529

TABLE I
OVERVIEW OF INDOOR LOCALIZATION TECHNOLOGIES

Technology	Accuracy (m)	Coverage (m)	Measurement principle	Ref.
Cameras	0.0001 to 0.1	1 to 10	Angle from images	[2]
Infrared	0.6 to 2	1 to 5	Thermal imaging	[7]
RFID	1 to 5	2	Proximity detection	[2]
Wi-Fi	1 to 3	40	Signal strength	[5]
Bluetooth	1 to 3	20 to 40	Signal strength, angle of arrival	[8]
UWB	0.1 to 1	1 to 50	Time of arrival	[5], [9]
GNSS	10	outside	Time difference	[2]
Inertial sensors	0.2 to 1	10 to 100	Dead reckoning	[10]
Ultrasound	<0.15	30	Time difference	[3]

overview is then given in Section III, which discusses the main parts of our proposed system. The next section is concerned with the fundamental working principles of the different parts of our system. Section V discusses how different types of collected data are fused. Subsequently, we will demonstrate the performance of the Bluetooth one-dimensional (1-D) tracking as well as that of the overall system. Finally, Section VII draws the conclusions and gives an outlook for the future work.

II. RELATED WORK

Indoor localization has attracted increasing attention during the past decade, as the wide-scale proliferation of smart mobile devices (SMDs) has enabled a variety of location based systems (LBS) and applications including health management, surveillance, and marketing [1]. In general, there are a number of different signal modalities for conducting indoor localization [2]–[4]. While the ultra-wideband (UWB) and visible light communication technologies with high precision suffer from the requirements of additional equipment, relatively higher power consumption, and/or limited coverage, the achievable accuracy of many Bluetooth, Wi-Fi, and radio frequency identification (RFID) based systems is, however, only in the range of several meters. Such localization accuracy is too imprecise to meet the needs of the location-critical applications, like e.g. patient or asset tracking (several centimeters) [4]–[6]. Table I briefly summarizes the technologies used in indoor localization systems. Note that in most cases, only a single technology is used.

A. Acoustic Localization

Compared with the aforesaid signal metrics, sound has been shown to be more capable of conducting fine-grained indoor localization. This is mainly because: the sound propagation velocity is much slower than the speed of light and, hence, the timestamps of the received signals are easier to determine and

higher localization accuracy is enabled. Nevertheless, as contamination is generally unavoidable for sound propagating in the complex indoor environments, signal detection on the receiver side can be troublesome. Actually, fine-grained LBS offering sub-meter precision remains a great challenge, especially in the scenarios where the working range is extended to several dozens of meters.

a) *Localization Systems*: Mandal *et al.* [11] present Beep, a Wi-Fi-synchronized time-of-arrival (TOA) based acoustic localization system which can attain the accuracy of 90 cm in 95% of the experiments. Ens *et al.* suggest a similar time-difference-of-arrival (TDOA) framework called ASSIST [12], in which the SMD emits sound signals in the frequency of 18 to 21 kHz. Wang *et al.* present an asynchronous acoustic localization system ARABIS [13] which adopts two-way ranging to remove the need for synchronization. 95-percentile localization error of 7.4 cm is reported in [13].

b) *NLOS Mitigation*: However, the anticipated positioning accuracy of the mentioned systems and approaches for localization will be guaranteed only when the connections between the SMD and base stations are under line-of-sight (LOS). The system performance can be seriously impaired in the presence of non-line-of-sight (NLOS) and/or multi-path propagation. Indeed, there is still a yearning to devise serviceable indoor localization systems for industrial circumstances subject to plenty of adverse factors. Certain approaches give lower weights or discard unlikely measurements based on probabilistic motion models, additional sensors or, generally speaking, based on having more mathematical constraints than variables. In [14] a robust Extended Kalman filter is used to give lower weights to unlikely measurements. In [15] an interacting multiple model estimator is used. Specifically, two models are used, a model which assumes a high number of NLOS measurements and one which assumes only LOS measurements. Maximum correntropy based location approaches are also capable of mitigating the effect of non-line-of-sight measurements [16] and can also be combined with a Kalman filter when a certain motion model can be assumed [17]. Using relative signal amplitudes, a probabilistic algorithm for classification and rejection of NLOS signals, as shown by Haigh *et al.* [18] may be developed. In certain scenarios, non-line-of-sight signals can be modeled as virtual receivers which contain information about the position of the target and do not need to be discarded [19]. The presented works deal with the known interferences generally by having a high number of acoustic measurements, some of which are assumed to be in line-of-sight. In this work, we propose using further means of localization to mitigate those effects.

B. BLE Localization

The usage of BLE in the context of localization was first proposed Faragher and Harle [8] (localization by fingerprinting). The research on algorithms, both for fingerprinting, as well as for RSSI-Distance models, is still an ongoing topic.

c) *RSSI-Distance Models*: As for example, recently Alsmadi *et al.* [20] proposed a beacon weighting approach, extending the commonly used weighted centroid algorithm [21]. In that paper the authors add a Kalman filter

to filter the RSS measurements. This approach fits to time series data, whereas in our paper deals with static measurements. As before a Bayesian approach is used to smooth the localization estimates. Pinto *et al.* [22] show the advantage of clustering the RSS fingerprints in several different log-distance models. This is relevant in larger settings with multiple different rooms, in our paper we try to address the problem of systematic errors in US systems, as well as the accurate localization in corridors. However our work may certainly be extended by a clustering approach.

d) *Fingerprinting*: As for fingerprinting techniques, Zuo *et al.* [23] propose a sampling method with a cart, as well as introducing different fingerprinting maps for different times of the day. More recently Ji *et al.* [24] proposed multivariable fingerprints for general fingerprinting-based localization systems, this approach is unfeasible for our system since only the raw RSSI was available.

e) *Other Topics*: A study on the RSSI measurement accuracy of different smartphones was presented by Boussad *et al.* [25]. Lee and Lin propose a localization system based in the variations of measurable RSS values, to track the entering and exiting of persons in rooms [26]. Another highly relevant topic is the placement of beacons, which is discussed by Rezazadeh *et al.* [27]. In contrast of placing several beacons, Li *et al.* [28] propose a RSS-based localization method with a single access point with three directional antennas. Jeon *et al.* [29] present a survey on commercially available beacons, their performance metrics and use cases.

C. Combined Localization

Utilizing multiple means of localization is a common topic in literature to achieve more accurate and robust results. Table II gives a comprehensive overview of combined localization approaches. A fruitful target is using smartphones for localization since they are usually equipped with a multitude of sensors like BLE, WiFi, acoustic, IMUs, cameras. Langlois *et al.* [30] present a comprehensive overview on how localization with smartphones, utilizing different sensors may be achieved. Several works have been proposed combining inbuilt sensors with infrastructure based localization technologies. One of the most straight-forward ways is using the RSSI of BLE nodes and combining the information with the data delivered by an IMU [31]. Similar approaches were investigated in [32]–[34]. Furthermore, Yu *et al.* [35] combine BLE with a inertial navigation system (INS) and PDR, to also obtain accurate heading and speed estimations. Another common concept is combining BLE and UWB, what allows for several different approaches. One is using a, with UWB, finely calibrated RSSI-map [36] and another is directly fusing the UWB measurements with the data of a RSSI-distance model [37]. Coded, visible light localization can provide high accuracy with centimeter accuracy, in addition with a signal strength signal or IMU the estimation can be made more robust against e.g. LED outages [38], [39].

The combination between ultrasound and BLE, as presented in this paper, to the best of our knowledge, has never been proposed before. Although both technologies have already been

TABLE II
COMBINED LOCALIZATION APPROACHES

Authors	Combined Technologies	Ref.
Chen <i>et al.</i>	BLE, IMU	[31]
Liang and Krause	BLE, IMU, compass	[40]
Dinh <i>et al.</i>	BLE, PDR	[32]
Yu <i>et al.</i>	BLE, PDR, INS	[35]
Multiple	BLE, UWB	[36], [37]
Monica and Bergenti	UWB, WiFi	[41]
Guan <i>et al.</i>	LiFi, IMU	[39]
Thaljaoui and Khediri	BLE, Acoustic, LiFi	[42]
Yang <i>et al.</i>	Acoustic, IMU	[43]

used in combination, where e.g. BLE is used to synchronize the ultrasonic signals [44]–[46] or in further combination with Light Fidelity (LiFi) [42], but never tightly coupled in the TDOA algorithm. Our main contributions are:

- Two algorithms to obtain a constrained location estimation with RSSI measurements.
- An algorithm to tightly integrate RSSI measurements directly into the ultrasonic TDOA algorithm to enhance the accuracy and robustness in fringe parts of the coverage area. The main advantage of this algorithm is that it uses the RSSI measurements to constrain the parametrized TDOA solution space by estimating the maximum distance at which the target can be from the beacons. Therefore, it assumes a realistic environment where the RSSI at a certain distance can vary due to changes in the environment, increasing the robustness of the estimations.
- An comprehensive experimental error analysis of the constrained algorithms as well as the fusion algorithm.

III. SYSTEM OVERVIEW

A. Overview

The backbone of our system is the ultrasonic localization system ASSIST [12]. It consists of one or more tags, which are able to transmit ultrasonic chirps. These may then be picked up by receivers with known position. Fig. 1 shows the system concept. Due to multiple paths along which the emitted signal travels, the delay estimation might be heavily distorted. This happens in areas with sound-hard materials nearby. Intelligently placing the Bluetooth Low Energy (BLE) beacons therein, a multi-modal approach can be applied to reduce these distortions by utilizing the additional information provided by the BLE system. The BLE beacons transmit an advertisement signal with the period of t_{Adv} , which can be received by the tag to yield a received signal strength indicator (RSSI). The tag is connected by a 868 MHz RF communication link (through which RSSI values are transmitted and the tag is synchronized) to a central server on which the localization is performed.

B. Bluetooth

Bluetooth provides a simple and cheap way of adding further information to a localization system. BLE beacons are

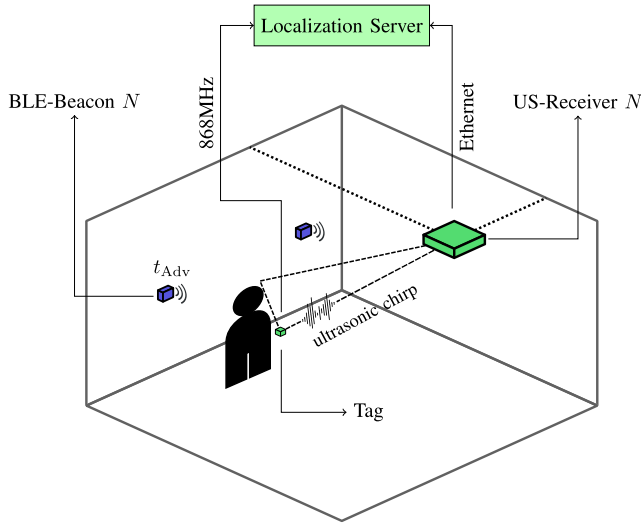


Fig. 1. System overview. The system consists of a tag able to emit ultrasonic chirps and receive BLE messages with their respective RSSI. Beacons are mounted in areas where the accuracy of ultrasonic system is decreased. Several ultrasonic receivers (US-receivers) are mounted to the ceiling to receive the signal from the tag. The tag as well as the US-receivers communicate with a central localization server on which the localization is performed.

now readily available, and easy to install. The advertising capability of BLE enables a beacon to broadcast identity messages without being paired to any other devices. The Bluetooth Core Specification defines 40 different channels (center frequency of channels is $2402\text{ MHz} + k \cdot 2\text{ MHz}$ for $k = 0, \dots, 39$) of which three are used as advertisement channels [8]. A BLE beacon sends an advertisement package on one of these channels. This package, which contains an address and a payload, can then be received by any BLE-capable device. Usually, an RSSI is available on standard chips according to the payload. Our setup constrains itself on using only the RSSI and the beacon-identifying payload. Therefore, we do not use information concerning the channel (and respective frequency) or further information possibly available on the sample level.

C. Ultrasound

TDOA-based ultrasound positioning system is deployed in areas that require location information in higher precision.

In contrast to the majority of existing schemes optimizing some cost function over the Cartesian coordinates of sender position, we rely on the parameterization of hyperbolas, which are originally defined by the error-free TDOA information. We approximate the hyperbolas using the available but erroneous TDOA measurements, and aim to find a point thereon closest to all the other hyperbolas as the estimated sender location. A two-step strategy is put forward to fulfill the task. In our first-stage treatment, a parameterized nonlinear least squares (LS) estimation problem is to be solved. Next, we utilize a selection criterion built on a similar LS cost function to pick out the most plausible solution. It is worth noting that though derived based on the ℓ_2 -space, our parametric method

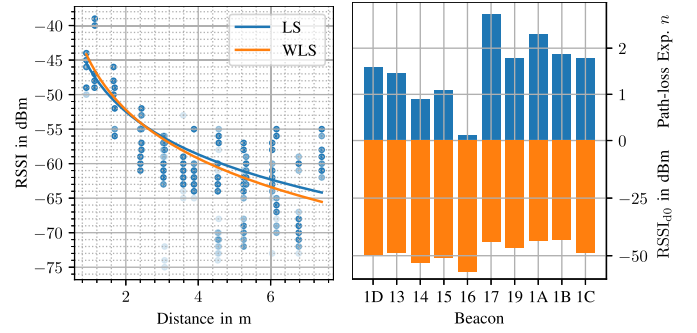


Fig. 2. Left: Progression of RSSI measurements over distance with LS and WLS fits with reciprocal distance weighting of Beacon 17. The fits yield the parameters ($n_{LS} = 2.06$, $\text{RSSI}_{d0,LS} = -46\text{ dBm}$) and ($n_{WLS} = 2.34$, $\text{RSSI}_{d0,WLS} = -45\text{ dBm}$). Right: LS parameter fits of the path-loss exponent n and the signal power RSSI_{d0} for different beacons. The path-loss exponents are varying significantly in contrast to the calibration signal powers.

possesses a higher level of robustness against outliers than the traditional ℓ_2 -space-based approaches.

IV. FUNDAMENTAL WORKING PRINCIPLES

In this section, the fundamental working principles and how the localization is performed and implemented in both systems is detailed. First, some fundamentals about the Bluetooth-based localization is presented and then the details of the utilized ultrasonic localization system.

A. Localization With Bluetooth

With the ever-increasing availability of BLE devices, the field of BLE localization has attracted significant research interest. The RSSI, which is generally available on the devices, is dependent on the distance between sender and receiver. The basic problem is to estimate the location by utilizing this indicator. There are two general tasks based on the RSSI, known as the distance estimation by signal attenuation and fingerprinting. We summarize the detailed methods as follows.

1) *Location Estimation by Multilateration*: The signal attenuation by the distance can be described with the Friis Free Space Path Loss (FSPL) model. The quadratic path-loss exponent can be generalized to a tuneable number n depending on the operation environment. Furthermore, with the assumption of isotropy of both the transmitter and receiver antennas, the model in (1) may be calibrated by a certain signal power RSSI_{d0} at the distance d_0 [20]:

$$\text{RSSI} = \text{RSSI}_{d0} - 10n \log \left(\frac{d}{d_0} \right) \quad (1)$$

Fig. 2 shows recorded data with LS and weighted LS (WLS) fits of the model, and illustrates the LS parameter fits of the path-loss exponent n and the signal power RSSI_{d0} for different beacons. By inverting this relationship, a point estimator can be derived which delivers a distance estimate for each RSSI value. This can be performed for the values of multiple beacons. The tag location may then be determined by multilateration.

Fig. 3 shows the distribution of measured RSSI values for 1m distance between the transmitter beacon and receiver tag.

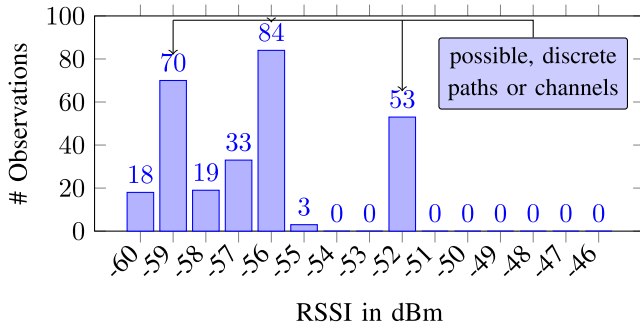


Fig. 3. Number of observations of RSSI values in 1 m distance. Due to effects like multipath fading, the distribution does not converge to a log-normal one.

The distribution does not converge to a log-normal, as would be expected, after more than 300 observations. This is caused by different attenuations and interferences on the different, used BLE-transmission channels and due to multipath interference [8]. A simple weighted centroid algorithm was proposed by Dong and Xu [21]. This approach combines the known beacon positions with the measured RSSI values to arrive at a location estimate by weighting and summing the positions.

2) *Location Estimation by Fingerprinting*: Besides direct inversion of a signal-strength-to-distance relationship, there exists a class of probabilistic methods. These methods seek to maximize the likelihood of a given observation belonging to a location [47]. The *posterior distribution* of the location is given by Bayes' law

$$p(l | o) = \frac{p(o | l)p(l)}{p(o)}, \quad (2)$$

where $p(l)$ is the prior distribution of the location l and $p(o | l)$ is the *likelihood function* of an observation o at a given location. A direct approach to estimate $p(o | l)$ is to build a map of the RSSI distribution in the operation environment. The map is collected by sampling a grid of K points within the desired room. In total, L beacons are used. A fingerprint matrix $\mathbf{F}$ consisting of the RSSI measurements $r_{i,j}$ (in dBm) is then built, where i is the index of the corresponding grid node and j the index of the beacon by which the signal has been transmitted.

$$\mathbf{F} = \begin{bmatrix} r_{0,0} & \dots & r_{0,L-1} \\ \vdots & \ddots & \vdots \\ r_{K-1,0} & \dots & r_{K-1,L-1} \end{bmatrix} \in \mathbb{Z}^{K \times L}. \quad (3)$$

The position estimation can be performed by a k-Nearest-Neighbor (kNN) regressor as described by algorithm 1.

A detailed overview of distance functions was given by Honkavirta *et al.* [48]. Another point to consider is the distance function subject to design that fits the dataset. In this case, the standard ℓ_2 -norm was employed. Since nearly no message contains an RSSI reading of every single beacon, this has to be taken care of in the distance function, i.e., only the beacons from which a reading is present are incorporated into the distance measure. If weighted equally, the fingerprints with few RSSI entries are equally weighted as fingerprints with similar distance. This may be incorporated into the weighting

Algorithm 1 Weighted kNN-Regression for RSSI-Based Position Estimation

Data: Fingerprint matrix $\mathbf{F} \in \mathbb{Z}^{L \times K}$, vector $\mathbf{o} \in \mathbb{Z}^K$ of observed RSSI values; Position matrix $\mathbf{P} \in \mathbb{Z}^{L \times 2}$

Result: Vector $\hat{\mathbf{p}} \in \mathbb{R}^2$ of estimated spatial position

begin

$\hat{\mathbf{d}} = \text{distance}(\mathbf{F}, \mathbf{o})$; $\hat{\mathbf{d}} \in \mathbb{R}^L$;

$\mathbf{u} \leftarrow \min(\hat{\mathbf{d}}, k)$ // the k smallest entries ;

$\mathbf{w} = \text{weight}(\mathbf{u}, \hat{\mathbf{d}})$

$\hat{\mathbf{p}} = \mathbf{w}^T \mathbf{u}$

function by adding a term k , which evaluates the number of compared RSSI measurements. This weighting function is then

$$\text{weight}(\mathbf{u}, \hat{\mathbf{d}}) \triangleq \hat{\mathbf{d}}^{-1} + k \text{ for } \hat{\mathbf{d}} > \mathbf{0}, \quad (4)$$

where $\mathbf{u}$ are the selected candidates and $\hat{\mathbf{d}}$ the values of the selected distance metric, both as defined in algorithm 1.

3) *Linear Constraint Estimation*: Due to the high setup cost and with time increasing obsolescence of fingerprints, it is desirable to use a model that does not rely on many calibration points. Additionally in cases where a localization is performed within a corridor or similar geometry, a linear constraint may be imposed on the localization. In the fingerprinting case, this simply reduces to removing fingerprints not lying in proximity of the constraint. For methods which utilize relations like equation (1), two models are now presented.

a) *Constrained Localization by Likelihood (CLL)*: A likelihood function is derived from a RSSI-distance model. A circular density function $\mathcal{L}(\mathbf{x})$ around each beacon, with a radius according to the measurement data, is created and summed up for every given measurement

$$\mathcal{L}(\mathbf{x}) = \sum_i \left\| \frac{\|\mathbf{x} - \mathbf{b}_i\|_2^2}{d_i^2} - 1 \right\| \quad (5)$$

$$\arg \min_{\mathbf{x}} \mathcal{L}(\mathbf{x}) \text{ s.t. } \mathbf{A}\mathbf{x} = \mathbf{b}. \quad (6)$$

where $\mathbf{b}_i \in \mathbb{R}^2$ are the beacon locations and $\mathbf{A}$ is the linear constraint matrix. This non-convex function may then be minimized on the given constraint.

b) *Constraint Weighted Centroid (CWC)*: Another approach is to extend the WC method [21]. Prior to weighting and summing up, the beacons are projected to the nearest point on the constraint. Suppose the constraint (6) is reformulated as the parametric line function $\mathbf{g}(t) = \mathbf{m} + t\mathbf{n}$. The projected point is then given by $\mathbf{b}'_i = \mathbf{m} + \mathbf{n}(\langle \mathbf{n}, \mathbf{b}_i - \mathbf{m} \rangle / \langle \mathbf{n}, \mathbf{n} \rangle)$, where $\langle \cdot, \cdot \rangle$ denotes the inner product. In the next step, the weights w_i of each projected point $\mathbf{b}'_i$ and summed up to arrive at a location estimate $\hat{\mathbf{p}} = \sum w_i \mathbf{b}'_i$. Several weighting functions are given in [21], for instance a simple relative weight may be assigned proportional to the received RSSI value with $\sum w_i = 1$. One more approach is to use a distance model (e.g. (1)) and weight in the distance.

4) *Discussion*: The upside of multilateration is that there are usually only two parameters which have to be tuned to

perform a localization. In that way, it is not necessary to map out the whole localization area with calibration points. A low installation effort follows from this circumstance. Prior information may be incorporated by constraining the localization estimation as detailed above. The caveat is although that the RSSI measurements are highly corrupted by noise, environment and multipath effects, as shown earlier. Furthermore, due to the available information, it is in general difficult to incorporate antenna isotropies in a simple way. However, PCB-antennas with high anisotropies are frequently used in such devices because of the inexpensiveness to integrate them. This leads to further restrictions on the performance. Another point is the changing environment in the deployment area, which may lead to obsolescence of fitted model parameters. Therefore, this is only a coarse approach with limited generality.

Fingerprinting on the other hand solves the problems of geometrical influences of the surroundings and anisotropies. Moreover, *a priori* information is naturally encoded by only adding fingerprints where the probability is nonzero. Still this approach requires a significant additional installation effort due to the sampling of a complete calibration point map. Also it will remain limited when it comes to changing environments, which may render the calibration map obsolete (or imprecise) over time.

B. Ultrasound Localization

In ultrasound localization, the low propagation speed $c_{ac} \approx 343 \text{ m s}^{-1}$ is exploited to reduce the instrumentation complexity when measuring time. In this work, we regard the TDOAs, which are calculated from the TOAs.

1) *Time of Arrival*: The propagation time $t_{s,i}$ between the sending time t_s of a moving beacon and the TOA T_i of this transmission at the i th receiver is formulated as

$$T_i = t_s + t_{s,i}. \quad (7)$$

We assume the sound wave travels in a straight line, so we can reduce the distance estimation to

$$c_{ac} \cdot t_{s,i} = \|\mathbf{M}_i - \mathbf{S}\|_2, \quad (8)$$

where $\mathbf{M}_i = [x_i, y_i]^T$ is the known i th receiver's position and $\mathbf{S} = [x, y]^T$ the position of the sender at the time of transmission.

2) *Time Difference of Arrival*: The sending time t_s of all recorded TOAs from one sender is the same. Hence, regarding the differences $\Delta T_{i,j}$ between the TOA of two different receivers (i.e., T_i and T_j) for the same transmitted signal removes the sending time from the localization problem:

$$\Delta T_{i,j} = T_i - T_j. \quad (9)$$

This leaves the speed of sound c_{ac} , the multidimensional sender position $\mathbf{S}$ and a remaining timing error $\vartheta_{i,j}$, which can be regarded as a cumulative error term, to be estimated. The resulting hyperbolic equation shown in (10) needs to be solved for the sender position for each measurement.

$$\vartheta_{i,j} = \Delta T_{i,j} - \frac{1}{c_{ac}} (\|\mathbf{M}_i - \mathbf{S}\|_2 - \|\mathbf{M}_j - \mathbf{S}\|_2). \quad (10)$$

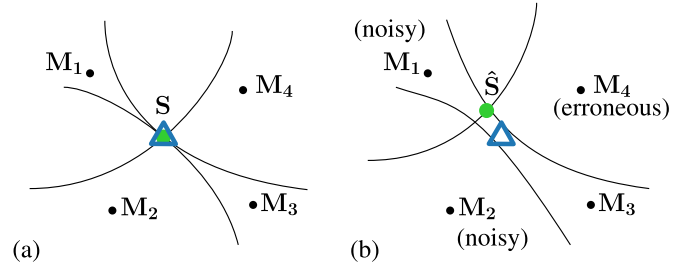


Fig. 4. Sample geometry of ultrasound localization, $\mathbf{M}_n$ are the US receivers, $\mathbf{S}$ and $\hat{\mathbf{S}}$ are the true and estimated sender locations respectively. (a) General operation of noisy-free TDOA-based positioning. (b) Estimation result of parameterization scheme using noisy and erroneous TDOA measurements.

As it is shown in Fig. 4, geometrically, each noise-free TDOA equation (10) defines a hyperbola on which the sender should lie in the two-dimensional (2-D) space. With at least two hyperbolas, the sender location is produced by intersection.

The pros and cons of TDOA-based ultrasound localization are summarized as follows.

Pros:

- With the use of (10), synchronization between the sender and receivers is not needed anymore.
- The influence of signal amplitude is limited to timestamp acquisition.

Cons:

- Sensitive to echoes from multipath propagation.
- Positions of receivers have to be known in advance.
- Change of receiver positions requires re-initialization of the system.
- Receivers still need to be synchronized.

Despite the promising achievable accuracy assured by the TDOA and acoustic metrics [5], the localization performance of such a system can still be easily degraded in the presence of adverse environmental factors (e.g., NLOS and multipath propagation) inducing biased received timestamps. The challenge is the potential deduction between NLOS errors in two paths in the construction of TDOA measurements, which in turn covers up the bias-like feature of the error. Recently, convex optimization has been successfully exploited to settle this matter [49], [50], whose theoretical feasibility and robustness have been validated through extensive numerical simulations. Nevertheless, solving the resultant convex programs usually leads to very high computational complexities, which is unacceptable in real-world industrial scenarios.

Recent efforts into expression other than the conventional Cartesian coordinates in localization have achieved promising results [51], [52], which inspire us to formulate TDOA localization under possible adverse conditions in a completely different form. In short, the idea of parameterization is conceived to reshape the relationship between the sender position and TDOA measurements, after which the optimization is carried out over the newly introduced parameters (each one being associated with a corresponding hyperbola). Thus, the problem raised is lent plain and direct geometric significance that a point on one TDOA-defined hyperbola closest to all the other hyperbolas is to be searched. Assume that we have N

spatially separated ultrasound receivers in the 2-D space. The TDOA model (10) can be rewritten as

$$\frac{[(x - h_{i,j}) \cos(\gamma_{i,j}) + (y - k_{i,j}) \sin(\gamma_{i,j})]^2}{a_{i,j}^2} - \frac{[(x - h_{i,j}) \sin(\gamma_{i,j}) - (y - k_{i,j}) \cos(\gamma_{i,j})]^2}{b_{i,j}^2} = 1, \quad (11)$$

if we let $h_{i,j} = \frac{x_i + x_j}{2}$, $k_{i,j} = \frac{y_i + y_j}{2}$, $a_{i,j} = \frac{(\Delta T_{i,j} - \vartheta_{i,j})c_{ac}}{2}$,

$$b_{i,j} = \frac{\sqrt{(x_i - x_j)^2 + (y_i - y_j)^2 - (\Delta T_{i,j} - \vartheta_{i,j})^2 c_{ac}^2}}{2}, \quad (12)$$

and $\gamma_{i,j} = \arctan\left(\frac{y_i - y_j}{x_i - x_j}\right)$. A popular parametric equation in $\mathbf{t} = [t_{1,2}, \dots, t_{1,N}, t_{2,3}, \dots, t_{N-1,N}]^T \in \mathbb{R}^{\frac{N(N-1)}{2}}$ for describing (11) is

$$\begin{aligned} x(t_{i,j}) &= \pm a_{i,j} \cosh(t_{i,j}) \cos(\gamma_{i,j}) \\ &\quad + b_{i,j} \sinh(t_{i,j}) \sin(\gamma_{i,j}) + h_{i,j}, \\ y(t_{i,j}) &= \pm a_{i,j} \cosh(t_{i,j}) \sin(\gamma_{i,j}) \\ &\quad - b_{i,j} \sinh(t_{i,j}) \cos(\gamma_{i,j}) + k_{i,j}. \end{aligned} \quad (13)$$

Replacing $\Delta T_{i,j} - \vartheta_{i,j}$ by the available $\Delta T_{i,j}$ and based on (13), we propose to solve the following minimization problem:

$$\hat{\mathbf{t}} = \arg \min_{\mathbf{t}} \sum_{m=1}^{\frac{N(N-1)}{2}-1} \sum_{l=m+1}^{\frac{N(N-1)}{2}} \left\| \begin{bmatrix} x([\mathbf{t}]_m) \\ y([\mathbf{t}]_m) \end{bmatrix} - \begin{bmatrix} x([\mathbf{t}]_l) \\ y([\mathbf{t}]_l) \end{bmatrix} \right\|_2^2, \quad (14)$$

which aims at finding a set of points on the TDOA-defined hyperbolas with each one of them having the minimum Euclidean distances (in the nonlinear LS sense) to others. Note that $[\mathbf{t}]_m$ represents the m th element of vector $\mathbf{t}$. It is seen that (14) falls into the category of nonlinear LS problems, for which mature optimization solvers are plentifully available. Once we have obtained $\hat{\mathbf{t}}$ from (14), a simple selection scheme applying the similar LS cost function is then utilized to produce the final estimate of the sender position as $\hat{\mathbf{S}} = [x([\hat{\mathbf{t}}]_{\hat{m}}), y([\hat{\mathbf{t}}]_{\hat{m}})]^T$, where

$$\hat{m} = \arg \min_m \sum_{\{l | 1 \leq l \leq N(N-1)/2, l \neq m\}} \left\| \begin{bmatrix} x([\hat{\mathbf{t}}]_m) \\ y([\hat{\mathbf{t}}]_m) \end{bmatrix} - \begin{bmatrix} x([\hat{\mathbf{t}}]_l) \\ y([\hat{\mathbf{t}}]_l) \end{bmatrix} \right\|_2^2. \quad (15)$$

For illustrative purposes, the procedure of TDOA-based parameterized localization is summarized in Algorithm 2 and a sample geometry with $N = 4$ is depicted in Fig. 4(b). It is observed that the erroneous and noisy timestamps collected at the corresponding receivers (due to disturbances and possible NLOS propagation conditions) might result in heavily stretched hyperbolas, which no longer intersect at an exact point can in turn greatly deteriorate the localization performance. Nonetheless, our parameterization scheme is still capable of yielding reliable sender location estimates.

Algorithm 2 TDOA-Based Parameterized LS Position Estimation

Data: TDOA measurements $\{\Delta T_{i,j}\}$, vector $\mathbf{o} \in \mathbb{Z}^K$ of observed RSSI values, and receiver positions $\{\mathbf{M}_i\}$.

Result: Vector $\hat{\mathbf{S}} \in \mathbb{R}^2$ of estimated sender position.

begin

- (i) Solve (14) with additional NLOS error mitigation constraints (16)–(18) for fusion being considered;
 - (ii) Perform data selection according to (15).
-

V. FUSION

When having the time difference of arrival of two receivers, the possible locations of the sender lie in a hyperbola (10). Under ideal circumstances, one would estimate the position of the sender by locating the intersection of multiple hyperbolas in the 2-D space. However, in certain occasions, LOS signals are blocked and only NLOS signals are received. Moreover, the sender can be at a large distance from the receivers such that its signals can only reach a limited number of receivers. One could place a large number of receivers, but this would increase the cost of the system.

Due to the high precision of the acoustic measurements compared to the RSSI measurements, it is convenient to estimate the position of the target using the acoustic measurements when they are available. However, at certain occasions only two or three LOS acoustic measurements are available. In these cases, one can make use of the RSSI measurements to choose the most likely TDOA solution. Moreover, one can also use the RSSI measurements to discard NLOS measurements, which would lead to unfeasible estimations. In order to do this, we propose to take advantage of the TDOA information to estimate a position, which is constrained by the RSSI measurements.

Then, we minimize (14) and (15) with the constraint

$$\|\hat{\mathbf{S}} - \mathbf{b}_i\|_2 \leq d_{\max,i} \quad \forall i \in [0, \dots, L], \quad (16)$$

where $\mathbf{b}_i$ are the beacon positions and $d_{\max,i}$ is defined by the received signal strength RSSI_i as

$$d_{\max,i} = 10^{\frac{(\text{MAXRSSI} - \text{RSSI}_i)}{(10\gamma)}}. \quad (17)$$

The value of MAXRSSI is the maximum received signal strength at 1 m in LOS. In doing so, $d_{\max,i}$ will provide us with a higher bound for the distance to the beacon, as the distance to it can never be higher than $d_{\max,i}$. In other words, an RSSI means that either the target is at a distance $d_{\max,i}$ in ideal conditions or the signal has been attenuated, in such case the target will be closer to the beacon. The NLOS noise of the received timestamps must be also positive, i.e.,

$$T_i \geq t_s + t_{s,i} + \epsilon_i, \quad (18)$$

where ϵ_i accounts for the LOS noise, which is assumed to be limited.

Imposing these constraints over the parametrized hyperbolas mentioned in the previous section results in the estimated position of the target.

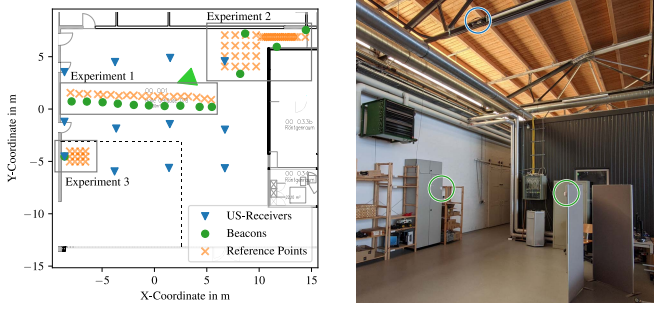


Fig. 5. Left: Experiments Overview. The first experiment is concerned with estimating the performance of linear constrained localization with BLE, whereas the second demonstrates the efficacy of using BLE data to directly enhance the TDOA solution. The point of view of the right figure is marked with the green triangle. Right: View of the second experiment. The US-receiver (blue) is mounted at a height of 4.8 m. The two foremost Bluetooth beacons (green) are visible, which are installed at a height of 1.6 m. The left figure shows the corresponding point of view.

We also eliminate the TDOA measurements which do not fulfill:

$$|\Delta T_{i,j}| - \xi \leq \frac{1}{c_{ac}} (\|\mathbf{M}_i - \mathbf{M}_j\|_2), \quad (19)$$

where ξ is set depending on the measurement noise distribution.

VI. EVALUATION

The Bluetooth and ultrasound localization experiments were conducted using *Minew E2 Max Beacons* and the ASSIST system [12], respectively. The cost of the Bluetooth devices lie in the order of tenths of euros, whereas the US system in several hundredths per receiver (without installation). Note that the latter is an acoustic indoor TDOA target localization system based on the high pitched chirp signals and several Wi-Fi-connected US-receivers. Unless stated otherwise, the transmission power for the Bluetooth system was set to 4 dBm. The Bluetooth connection on the tag was handled by a *Silicon Labs BGM121* Module. The error is measured as root mean square (RMSE).

A. Exp. 1: Measurements of 1-D-BLE-Localization

To determine to general localization accuracy in a linear constraint BLE localization setup, an experiment was conducted, where a number of 10 beacons were placed on a line on the floor 1.5 m apart (see Fig. 5). Around 10k RSSI measurements at 19 different points have been taken at a distance of around 1 m to the beacons and at a height of 0.3 m. The positions of both beacons and RSSI measurements were localized by the ultrasonic localization system, which has good coverage in that area. This dataset was split equally in a training and test set (position-wise), to provide a calibration map for the fingerprinting (FP) method (CLL and CWC do not need a training set, if parameters are assumed). The evaluation was then done on the test set for all methods. For the CLL and CWC methods, we assumed a path loss of $n = 2.0$ and a calibration RSSI of $\text{RSSI}_{d0} = -50$ dBm were assumed. A higher path-loss as well as the lower

TABLE III
ERROR METRICS FOR 1D-BLE-LOCALIZATION WITH $K_{avg} = 2$

# Beacons	Method	Median in m	95% CI in m
10	FP	0.80	4.66
	CLL	0.90	5.53
	CWC	1.01	5.32
5	FP	2.39	7.79
	CLL	1.84	6.25
	CWC	1.79	6.02
2	FP	2.49	7.39
	CLL	2.22	8.56
	CWC	2.97	8.92

TABLE IV
ERROR METRICS FOR US/BT-FUSED LOCALIZATION

BT	Min. # Hyp.	Median in m	95% CI in m
•	2	0.58	5.62
	2	0.69	7.55
•	3	0.48	4.66
	3	0.53	5.72
•	4	0.38	2.96
	4	0.44	5.54

calibration signal strength level assumption is explained by the geometry of the setup: the beacons lie flat on the ground, and the measurements were taken to the right in which direction the antenna attenuation was lower. Measurements lower than -65 dBm were discarded. Fig. 6 demonstrates the performance of the proposed methods. While the fingerprinting method achieves the lowest errors in most cases, in settings with several beacons at hand, the direct methods are on-par. As expected, the error increases as the number of beacons decreases. With a higher number of averaged messages K_{avg} , the error may still be reduced. The degradation acts on all methods roughly equally. In the error sense, the fingerprinting is slightly ahead in low averaging settings with few beacons as well as the high averaging when many beacons are available. On the other hand, with low averaging and few beacons, there is not much accuracy improvement of the CLL or CWC method over random guessing. Table III provides an overview of some key error metrics of different methods.

B. Exp. 2: Data Fusion

In order to test if the RSSI measurements can improve the estimation results using only ultrasound timestamps, we performed an experiment where we set a total of 4 beacons and 12 US-receivers. The target is located in 35 different static positions. The beacons and the target positions are placed in areas which are poorly covered by the US-receivers (see Fig. 5). A path loss of $n = 1.6$ and $\text{RSSI}_{d0} = -26$ dBm was assumed in this scenario.

In Fig. 7 (left), one can observe the empirical cumulative distribution of the error in cases with different number of required intersecting hyperbolas. The result shows how using RSSI measurements reduce the large errors caused by NLOS

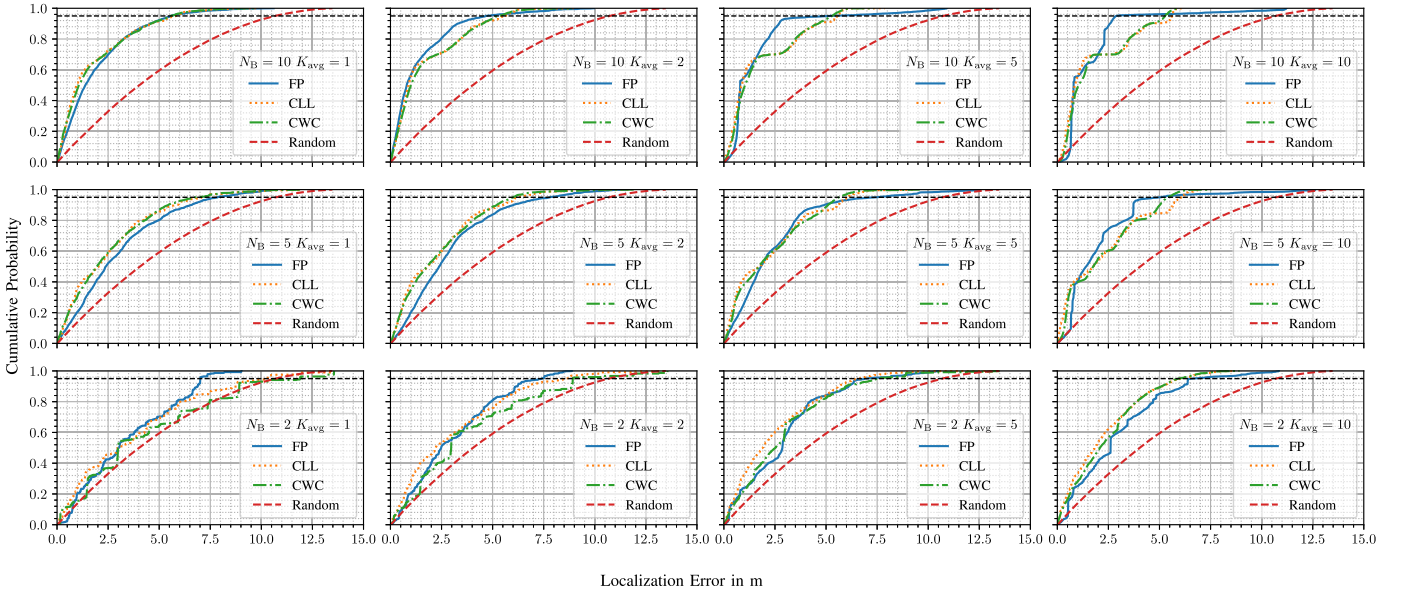


Fig. 6. Empirical cumulative distribution (ordinate) of the localization error (RMSE) in meters (abscissa) under different numbers of beacons N_B and RSSI measurements averaging factors K_{avg} . The 95% error margin is marked by the dashed line. The last column was measured using only the two outmost beacons. Under this condition, performance improvement over random guessing can hardly be achieved. With a higher count of averaged messages K_{avg} , a higher accuracy can still be obtained. For a higher number of beacons, these methods are on-par.

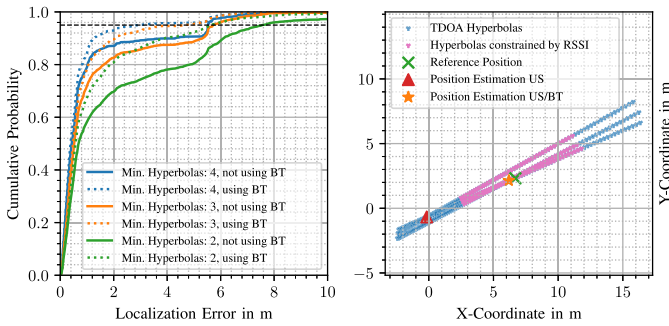


Fig. 7. *Left:* Empirical cumulative distribution of the localization error (RMSE) achieved by the presented data fusion approach with different minimum number of intersecting TDOA hyperbolas. One can observe how constraining the solution space with the RSSI measurements reduces the error caused by NLOS measurements. *Right:* Constraining the solution space with RSSI measurements, one can reduce the ambiguity caused by NLOS measurements. In this experiment, one can observe how the TDOA hyperbolas generated by the ultrasound measurements have two intersection points due to NLOS measurements. The crossing point corresponding to that produced from the LOS measurements is correctly chosen with the help of the Bluetooth (BT) measurements.

measurements. An example of this is shown in Fig. 7 (right), where the Bluetooth measurements constrain the solution space and remove the ambiguity caused by the NLOS measurements. Table IV tabulates the corresponding error metrics.

C. Exp. 3: Error Mitigation

In this experiment, one beacon is fixed to a wall. The ultrasonic localization system is prone to multipath errors, which are usually introduced by concrete surface (like e.g. walls, tables or the floor). This multipath influence can lead to great localization errors. The RSSI signal of the beacon

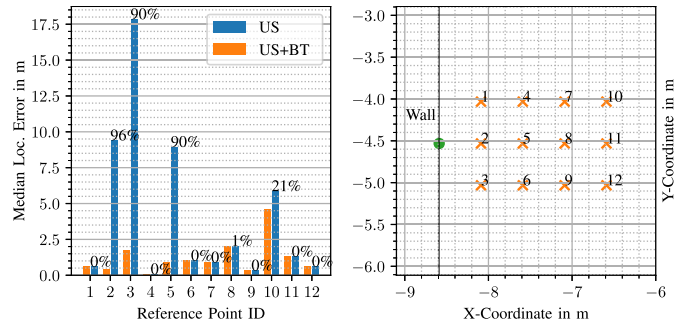


Fig. 8. *Left:* Median localization error in meters of the third experiment with error reduction in percentage. *Right:* IDs of the reference points in this experiment, with the beacon on left (green dot). In closer proximity to the beacon, the localization error may be minimized significantly.

is used to enhance the localization accuracy of the overall system. Figure 8 shows the median localization error and the corresponding reference point map. Generally the multipath influence increases with the proximity to the wall up onto a certain point where the phase difference is at a maximum, until it decreases again. In the figure, the US error closer to the wall is overall greater than farther away. The US positions were estimated with two hyperbolas 40.9% of the time, 58.7% with three and 0.36% with four. This is an indicator of the limited number of line-of-sight signals received in such positions. In areas with high multipath influence the algorithm is able to significantly reduce (e.g. median error of 27.84 m US vs. 0.39 m US+BT in reference point 2) the localization error in respect to only using the ultrasonic signal.

VII. CONCLUSION

We have shown possibilities to fuse the BLE data with those from an ultrasonic system. It was possible to show,

that the novel, proposed method, using BLE data to constrain the TDOA hyperbolas could improve the overall accuracy. In areas of low discriminability of ultrasonic measurements, the addition of smartly placed Bluetooth beacons can offer advancement to the localization accuracy. This concerns mostly areas outside the direct coverage area of the ultrasonic systems. Usually, ultrasonic systems are deployed in areas where 2-D localization is desirable. Deployed in areas where only 1-D localization is necessary (like corridors), the ultrasonic approach might be uneconomical due to the high installation effort. Adding Bluetooth beacons can serve as a simple extension to the coverage area of a localization system. For this use case, we proposed linear constrained localization methods and have demonstrated that the CWC method will be preferable if the effort of building up a map of fingerprints should be spared. In the future work, we will further investigate measures and fusion algorithms of how the hand-over between the two overlapping regions can be optimally handled based upon the achievable accuracy. Furthermore, the usage of microphone arrays in this scenario will pose interesting questions on how accurate localization can be performed with distorted ultrasonic data augmented by the Bluetooth counterpart. With the upcoming relevance of UWB in the area of indoor localization, an additional concern will be investigating under which circumstances UWB fails and how this can be mitigated by complementary measures.

REFERENCES

- [1] D. Lymberopoulos and J. Liu, "The microsoft indoor localization competition: Experiences and lessons learned," *IEEE Signal Process. Mag.*, vol. 34, no. 5, pp. 125–140, Sep. 2017.
- [2] R. Mautz, "Indoor positioning technologies," Habilitation thesis, Dept. Civil, Environ. Geomatic Eng., Inst. Geodesy Photogramm., ETH Zürich, Zürich, Switzerland, 2012, doi: [10.3929/ethz-a-007313554](https://doi.org/10.3929/ethz-a-007313554).
- [3] F. Höflinger, *Lokalisierungssysteme Für Die Positionsbestimmung von Personen Und Objekten Im Innenraum*. Uelvelsbüll, Germany: Der Andere Verlag, 2014.
- [4] F. Höflinger et al., "Acoustic indoor-localization system for smart phones," in *Proc. IEEE 11th Int. Conf. SSD*, Feb. 2014, pp. 1–4.
- [5] F. Zafari, A. Gkeliass, and K. K. Leung, "A survey of indoor localization systems and technologies," *IEEE Commun. Surveys Tuts.*, vol. 21, no. 3, pp. 2568–2599, 3rd Quart. 2017.
- [6] A. Yassin et al., "Recent advances in indoor localization: A survey on theoretical approaches and applications," *IEEE Commun. Surveys Tuts.*, vol. 19, no. 2, pp. 1327–1346, 2nd Quart. 2016.
- [7] R. F. Brena, J. P. García-Vázquez, C. E. Galván-Tejada, D. Muñoz-Rodríguez, C. Vargas-Rosales, and J. Fangmeyer, "Evolution of indoor positioning technologies: A survey," *J. Sensors*, vol. 2017, pp. 1–21, Mar. 2017.
- [8] R. Faragher and R. Harle, "Location fingerprinting with Bluetooth low energy beacons," *IEEE J. Sel. Areas Commun.*, vol. 33, no. 11, pp. 2418–2428, Nov. 2015.
- [9] F. Höflinger, R. Zhang, P. Fehrenbach, J. Bordoy, L. Reindl, and C. Schindelhauer, "Localization system based on handheld inertial sensors and UWB," in *Proc. IEEE Int. Symp. Inertial Sensors Syst. (INERTIAL)*, Mar. 2017, pp. 1–2.
- [10] R. Zhang, F. Höflinger, and L. Reindl, "Inertial sensor based indoor localization and monitoring system for emergency responders," *IEEE Sensors J.*, vol. 13, no. 2, pp. 838–848, Feb. 2013.
- [11] C. V. L. Atri Mandal, "Beep: 3D indoor positioning using audible sound," in *Proc. 2nd IEEE Consum. Commun. Netw. Conf.*, Jan. 2005, pp. 348–353.
- [12] A. Ens et al., "Acoustic self-calibrating system for indoor smart phone tracking," *Int. J. Navigat. Observ.*, vol. 2015, pp. 1–15, Feb. 2015.
- [13] Y.-T. Wang, J. Li, R. Zheng, and D. Zhao, "ARABIS: An asynchronous acoustic indoor positioning system for mobile devices," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2017, pp. 1–8.
- [14] J. Bordoy, C. Schindelhauer, R. Zhang, F. Höflinger, and L. M. Reindl, "Robust extended Kalman filter for NLOS mitigation and sensor data fusion," in *Proc. IEEE Int. Symp. Inertial Sensors Syst. (INERTIAL)*, Mar. 2017, pp. 117–120.
- [15] R. Zhang, F. Höflinger, and L. Reindl, "TDOA-based localization using interacting multiple model estimator and ultrasonic transmitter/receiver," *IEEE Trans. Instrum. Meas.*, vol. 62, no. 8, pp. 2205–2214, Aug. 2013.
- [16] W. Xiong, C. Schindelhauer, H. C. So, J. Bordoy, A. Gabbrielli, and J. Liang, "TDOA-based localization with NLOS mitigation via robust model transformation and neurodynamic optimization," *Signal Process.*, vol. 178, Jan. 2021, Art. no. 107774.
- [17] S. Li, B. Xu, L. Wang, and A. A. Razzaqi, "Improved maximum correntropy cubature Kalman filter for cooperative localization," *IEEE Sensors J.*, vol. 20, no. 22, pp. 13585–13595, Nov. 2020.
- [18] S. Haigh, J. Kulon, A. Partlow, P. Rogers, and C. Gibson, "A robust algorithm for classification and rejection of NLOS signals in narrowband ultrasonic localization systems," *IEEE Trans. Instrum. Meas.*, vol. 68, no. 3, pp. 646–655, Mar. 2019.
- [19] J. Bordoy, C. Schindelhauer, F. Höflinger, and L. M. Reindl, "Exploiting acoustic echoes for smartphone localization and microphone self-calibration," *IEEE Trans. Instrum. Meas.*, vol. 69, no. 4, pp. 1484–1492, Apr. 2020.
- [20] L. Alsmadi, X. Kong, K. Sandrasegaran, and G. Fang, "An improved indoor positioning accuracy using filtered RSSI and beacon weight," *IEEE Sensors J.*, vol. 21, no. 16, pp. 18205–18213, Aug. 2021.
- [21] Q. Dong and X. Xu, "A novel weighted centroid localization algorithm based on RSSI for an outdoor environment," *J. Commun.*, vol. 9, no. 3, pp. 279–285, 2014.
- [22] B. Pinto, R. Barreto, E. Souto, and H. Oliveira, "Robust RSSI-based indoor positioning system using K-means clustering and Bayesian estimation," *IEEE Sensors J.*, vol. 21, no. 21, pp. 24462–24470, Nov. 2021.
- [23] J. Zuo, S. Liu, H. Xia, and Y. Qiao, "Multi-phase fingerprint map based on interpolation for indoor localization using iBeacons," *IEEE Sensors J.*, vol. 18, no. 8, pp. 3351–3359, Jan. 2018.
- [24] W. Ji, K. Zhao, Z. Zheng, C. Yu, and S. Huang, "Multivariable fingerprints with random forest variable selection for indoor positioning system," *IEEE Sensors J.*, early access, Aug. 10, 2021, doi: [10.1109/JSEN.2021.3103863](https://doi.org/10.1109/JSEN.2021.3103863).
- [25] Y. Boussad, M. N. Mahfoudi, A. Legout, L. Lizzi, F. Ferrero, and W. Dabbous, "Evaluating smartphone accuracy for RSSI measurements," *IEEE Trans. Instrum. Meas.*, vol. 70, pp. 1–12, 2021.
- [26] H.-C. Lee and T.-T. Lin, "Low-cost indoor human tracking by utilizing fluctuation of received radio signal strength," *IEEE Sensors J.*, vol. 20, no. 21, pp. 13029–13036, Nov. 2020.
- [27] J. Rezazadeh, R. Subramanian, K. Sandrasegaran, X. Kong, M. Moradi, and F. Khodamoradi, "Novel iBeacon placement for indoor positioning in IoT," *IEEE Sensors J.*, vol. 18, no. 24, pp. 10240–10247, Dec. 2018.
- [28] C. Li et al., "CRLB-based positioning performance of indoor hybrid AoA/RSS/ToF localization," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2019, pp. 1–6.
- [29] K. E. Jeon, J. She, P. Soonsawad, and P. C. Ng, "BLE beacons for Internet of Things applications: Survey, challenges, and opportunities," *IEEE Internet Things J.*, vol. 5, no. 2, pp. 811–828, Apr. 2018.
- [30] C. Langlois, S. Tiku, and S. Pasricha, "Indoor localization with smartphones: Harnessing the sensor suite in your pocket," *IEEE Consum. Electron. Mag.*, vol. 6, no. 4, pp. 70–80, Oct. 2017.
- [31] J. Chen et al., "A data-driven inertial navigation/Bluetooth fusion algorithm for indoor localization," *IEEE Sensors J.*, early access, Jun. 15, 2021, doi: [10.1109/JSEN.2021.3089516](https://doi.org/10.1109/JSEN.2021.3089516).
- [32] T.-M.-T. Dinh, N.-S. Duong, and Q.-T. Nguyen, "Developing a novel real-time indoor positioning system based on BLE beacons and smartphone sensors," *IEEE Sensors J.*, vol. 21, no. 20, pp. 23055–23068, Oct. 2021.
- [33] T.-M.-T. Dinh, N.-S. Duong, and K. Sandrasegaran, "Smartphone-based indoor positioning using BLE iBeacon and reliable lightweight fingerprint map," *IEEE Sensors J.*, vol. 20, no. 17, pp. 10283–10294, Sep. 2020.
- [34] H. Xia, J. Zuo, S. Liu, and Y. Qiao, "Indoor localization on smartphones using built-in sensors and map constraints," *IEEE Trans. Instrum. Meas.*, vol. 68, no. 4, pp. 1189–1198, Apr. 2019.
- [35] Y. Yu et al., "A novel 3-D indoor localization algorithm based on BLE and multiple sensors," *IEEE Internet Things J.*, vol. 8, no. 11, pp. 9359–9372, Jun. 2021.

- [36] M. Kolakowski, "Kalman filter based localization in hybrid BLE-UWB positioning system," in *Proc. IEEE Int. Conf. RFID Technol. Appl. (RFID-TA)*, Sep. 2017, pp. 290–293.
- [37] J. Kolakowski, V. Djaja-Josko, M. Kolakowski, and K. Broczek, "UWB/BLE tracking system for elderly people monitoring," *Sensors*, vol. 20, no. 6, p. 1574, Mar. 2020.
- [38] G. B. Prince and T. D. C. Little, "A two phase hybrid RSS/AoA algorithm for indoor device localization using visible light," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Dec. 2012, pp. 3347–3352.
- [39] W. Guan, L. Huang, B. Hussain, and C. Patrick Yue, "Robust robotic localization using visible light positioning and inertial fusion," *IEEE Sensors J.*, early access, Jan. 21, 2021, doi: 10.1109/JSEN.2021.3053342.
- [40] P.-C. Liang and P. Krause, "Smartphone-based real-time indoor location tracking with 1-m precision," *IEEE J. Biomed. Health Inform.*, vol. 20, no. 3, pp. 756–762, May 2016.
- [41] S. Monica and F. Bergenti, "Hybrid indoor localization using WiFi and UWB technologies," *Electronics*, vol. 8, no. 3, p. 334, Mar. 2019.
- [42] A. Thaljaoui and S. El Khediri, "Adopting dilution of precision for indoor localization," *Wireless Pers. Commun.*, 2019, doi: 10.1007/s11277-019-06896-9.
- [43] H. Yang *et al.*, "Smartphone-based indoor localization system using inertial sensor and acoustic transmitter/receiver," *IEEE Sensors J.*, vol. 16, no. 22, pp. 8051–8061, Nov. 2016.
- [44] P. Lazik, N. Rajagopal, O. Shih, B. Sinopoli, and A. Rowe, "ALPS: A Bluetooth and ultrasound platform for mapping and localization," in *Proc. 13th ACM Conf. Embedded Networked Sensor Syst.*, J. Song, T. Abdelzaher, and C. Mascolo, Eds. ACM Press: New York, NY, USA, 2015, pp. 73–84.
- [45] S.-U. Yoon, J. Woo, J. Cho, and C.-R. Rahm, "An efficient distance estimation method based on Bluetooth low energy and ultrasound," in *Proc. IEEE Int. Conf. Consum. Electron.-Asia (ICCE-Asia)*, Jun. 2018, pp. 206–212.
- [46] A. De Angelis, A. Moschitta, and A. Comuniello, "TDoA based positioning using ultrasound signals and wireless nodes," in *Proc. IEEE Int. Instrum. Meas. Technol. Conf. (I2MTC)*, May 2017, pp. 1–6.
- [47] T. Roos, P. Myllymäki, H. Tirri, P. Misikangas, and J. Sievänen, "A probabilistic approach to WLAN user location estimation," *Int. J. Wireless Inf. Netw.*, vol. 9, no. 3, pp. 155–164, 2002.
- [48] V. Honkavirta, T. Perala, S. Ali-Loytty, and R. Piche, "A comparative survey of WLAN location fingerprinting methods," in *Proc. 6th Workshop Positioning, Navigat. Commun.*, Mar. 2009, pp. 243–251.
- [49] G. Wang, A. M.-C. So, and Y. Li, "Robust convex approximation methods for TDOA-based localization under NLOS conditions," *IEEE Trans. Signal Process.*, vol. 64, no. 13, pp. 3281–3296, Jul. 2016.
- [50] Z. Su, G. Shao, and H. Liu, "Semidefinite programming for NLOS error mitigation in TDOA localization," *IEEE Commun. Lett.*, vol. 22, no. 7, pp. 1430–1433, Jul. 2018.
- [51] A. A. Ghany, B. Uguen, and D. Lemur, "A parametric TDoA technique in the IoT localization context," in *Proc. WPNC*, Bremen, Germany, Oct. 2019, pp. 1–6.
- [52] Y. Sun, K. C. Ho, and Q. Wan, "Solution and analysis of TDOA localization of a near or distant source in closed form," *IEEE Trans. Signal Process.*, vol. 67, no. 2, pp. 320–335, Jan. 2019.



Georg Fischer received the B.Sc. degree in electrical engineering from TU Braunschweig, Germany, in 2017, and the M.Sc. degree in electrical engineering and information technology from the Karlsruhe Institute of Technology (KIT), Germany, in 2019. He joined as a Research Assistant in the field of signal processing with the Fraunhofer Ernst-Mach-Institute (EMI) in 2020.



Joan Bordo received the degree in telecommunications engineering from the Polytechnic University of Catalonia (UPC), Barcelona, Spain, in 2013, and the Ph.D. degree in computer science with a focus on algorithms for acoustic localization in mixed environments with line-of-sight and non-line-of-sight from the University of Freiburg through the Ph.D. Program Decentralized Sustainable Energy Systems, under the supervision of Prof. C. Schindelhauer, in 2020. He joined the Computer Networks and Telematics Chair, University of Freiburg, in 2013.



Dominik Jan Schott (Member, IEEE) received the B.Sc. and M.Sc. degrees in microsystems engineering from the University of Freiburg, Germany, in 2012 and 2015, respectively.

He trained as a Microtechnologist specialized on semiconductor fabrication at Robert Bosch GmbH, Reutlingen, Germany, where he graduated in 2009. Afterwards, he joined the Fraunhofer Institute for Solar Energy Systems (ISE), Freiburg, Germany, developing production management tools. He has been with the Laboratory for Electrical Instrumentation, Department of Microsystems Engineering (IMTEK), University of Freiburg, under Prof. L. M. Reindl, from 2011 to 2020, where he has been working on his Ph.D. thesis, since 2016. He is now with the Laboratory of Electrical Instrumentation and Embedded Systems. His research has covered radar flow measurements, ultra-low power wake-up receivers, infrared spectrometry, and currently acoustic communication with a focus on underwater applications.



Wenxin Xiong (Graduate Student Member, IEEE) grew up in Wuhan, China. He received the B.Eng. degree in electrical engineering and automation from Northwestern Polytechnical University, Xi'an, China, in 2017, and the M.Sc. degree in electronic information engineering from the City University of Hong Kong, Hong Kong, China, in 2018. He is pursuing the Ph.D. degree with the University of Freiburg, Freiburg, Germany, under the lead of Prof. C. Schindelhauer, Chair of Computer Networks and Telematics (CoNe).

From October 2018 to June 2019, he was a Research Assistant with the Department of Electrical Engineering, City University of Hong Kong. From July 2019 to September 2020, he worked as a Scientific Staff at CoNe. He also serves as a reviewer for international journals, including *Signal Processing*, *IEEE SIGNAL PROCESSING LETTERS*, *IEEE COMMUNICATIONS LETTERS*, and the *Journal of the Acoustical Society of America*. His current research interests lie in the fields of localization, robust estimation, optimization, and deep learning.



Andrea Gabbriellini received the B.Sc. degree in telecommunications engineering from the Faculty of Engineering, University of Pisa, Pisa, Italy, in 2014, and the M.Sc. degree in computer science from the Faculty of Engineering, Albert-Ludwigs-Universität Freiburg, Freiburg im Breisgau, Germany, in 2019. He joined the Laboratory for Electrical Instrumentation, Department of Microsystems Engineering (IMTEK), University of Freiburg, Germany, in 2019, as a Scientific Researcher in the field of signal processing for indoor localization.



Fabian Höflinger received the B.Sc. degree in automation engineering from the University of Applied Sciences Ravensburg-Weingarten, Weingarten, Germany, in 2007, the master's degree in automation and energy systems from the Mannheim University of Applied Sciences, Mannheim, Germany, in 2007, and the Ph.D. degree in microsystems engineering from the University of Freiburg, Freiburg im Breisgau, Germany, in 2014, with a focus on localization systems.

He was with Junghans Feinwerktechnik, Dunningen/Seedorf, Germany, where he developed components for telemetric systems. From 2007 to 2010, he was a Development Engineer. Since 2010, he has been with the Laboratory for Electrical Instrumentation, Department of Microsystems Engineering, University of Freiburg, where he has also been a Group Leader, since 2014, and has a research group in the field of indoor localization. Since 2019, he has also been working for the Fraunhofer Ernst-Mach-Institut (EMI).



Kai Fischer received the Diploma degree in applied mathematics, the master's degree in building physics, and the Ph.D. degree in engineering sciences. He is the Head of the Group Robustness and Resilience Analysis with the Fraunhofer Institute for High-Speed Dynamics, Ernst-Mach-Institut (EMI), Freiburg.



Christian Schindelbauer (Member, IEEE) received the Diploma degree in computer science from Technische Universität Darmstadt, Darmstadt, Germany, in 1992, the Dr.rer.nat. degree from the University of Lübeck, Lübeck, Germany, in 1996, and the Habilitation degree from the University of Paderborn, Paderborn, Germany, in 2002.

He was a Scientific Staff Member under the lead of Prof. R. Reischuk from 1992 to 1999 and a Postdoctoral Researcher with the Theory Group, International Computer Science Institute, Berkeley, CA, USA, under the Group Leader Prof. R. Karp, in 1999. He became a Lecturer with the University of Paderborn in 2002, after being a Postdoctoral Researcher since 2001. Since 2006, he has been a Professor of Computer Networks and Telematics with the University of Freiburg, Freiburg im Breisgau, Germany. He has authored more than 150 peer-reviewed conference papers and journal articles. His current research interests include distributed algorithms, peer-to-peer networks, mobile *ad-hoc* networks, wireless sensor networks, localization algorithms, storage networks, and coding theory.

Dr. Schindelbauer has served as a program committee member of over 50 conferences. He received the Prof.-Otto-Roth-Award from the Universität Lübeck for an outstanding Ph.D. thesis in 1997. He is a Co-Editor of the *Telecommunication Systems* journal and a member of the Association for Computing Machinery and Gesellschaft der Informatik.



Stefan Johann Rupitsch (Member, IEEE) was born in Kitzbuehel, Austria, in 1978. He received the Diploma and Ph.D. degrees in mechatronics from Johannes Kepler University Linz, Austria, in 2004 and 2008, respectively, and the Habilitation degree from the University of Erlangen–Nuernberg, Germany, in 2018. In 2004, he was a Junior Researcher with the Linz Center of Mechatronics, Linz. From 2005 to 2008, he was with the Institute for Measurement Technology, Johannes Kepler University Linz.

From 2008 to 2020, he was with the Chair of Sensor Technology, University of Erlangen–Nuernberg, where he held a Deputy Professorship. Since December 2020, he has been a Full Professor of Electrical Instrumentation and Embedded Systems with the University of Freiburg. He has authored more than 150 articles in these fields and the book *Piezoelectric Sensors and Actuators: Fundamentals and Applications*. His research interests include piezoelectric transducers, energy harvesting, embedded systems, ultrasonic imaging and therapy, simulation-based material characterization, and noncontact measurements. He was a recipient of the Austrian Society of Measurement and Automation Technology Award for his Ph.D. dissertation in 2009 and the Outstanding Paper Award of the Information Technology Society in 2016. He is an Associate Editor of the IEEE SENSORS JOURNAL and the *TM. Technisches Messen* journal. He serves as a Guest Associate Editor for the *Journal of Sensors and Sensor Systems* (JSSS).